

ROUND

Multipurpose

Technical information



Quality standard

LST EN 15372:2017

10 year Warranty

See Warranty statement

Other documents available for this product

Cable management guidelines for ROUND Multipurpose conference and meeting tables
 NARBUTAS product care guide

Whiteboard with holder

Perforated top cover

Set of hooks for perforated top cover

Top and bottom side shelves

Metal frame under tabletop



Planter box

Top metal frame

Monitor holder

Tabletop

Hook

Central leg

Legs

Bottom metal frame



Technical information

Types

- 39,37" depth multipurpose tables and supplementary units (1)
- 55,12" depth multipurpose tables (2)

1



2



MFC (melamine) tabletop

- 0,98" thickness with 0,08" ABS edging;
- The corners of the tabletop are rounded: R3,94";
- With or without a cut-out for a grommet and power socket.

HPL tabletop

- 1,03" thickness MDF covered in HPL with sloping painted edging;
- The corners of the tabletop are rounded: R2,95";
- Sloping painted edges: white, black or grey colour;
- The bottom edges of the tabletop are sloped 75°;
- With or without a cut-out for a grommet and power socket.

Metal frame under tabletop

- Rectangular metal tube – 1,18x0,79";
- Powder-coated metal.

Top and bottom metal frame

- Round metal tube – Ø 1,57";
- Powder-coated metal.

Metal legs

- Bent metal tube - Ø 1,57";
- With welded metal tube (Ø 1,57") and plates for metal frame fixing;
- Powder-coated metal;
- Plastic feet with height levelling (+0,39") or castors (only for 39,37" depth tables).

Central leg (only for 39,37" depth tables)

- Bent metal tube Ø 1,57";
- With welded metal tube Ø 1,77", Ø 1,57" and plates for metal frame fixing;
- Powder coated metal;
- Plastic feet with height levelling (+0,39") or castors.

Central leg (only for 55,12" depth tables)

- Welded metal tube (Ø 1,57"), 2,36x1,18" and plates for metal frame fixing;
- Powder-coated metal;
- Plastic feet with height levelling (+0,39").

Supports or castors

- 39,37" depth tables are available with or without castors;
- Four swivel castors, Ø 3,94"), with wheel brakes;
- Castors rotate in all directions;
- Maximum load capacity: 220,46 lbs per castor.
- Make sure that, before relocating your table with castors, all electrical components are disconnected from the main power source and stacked into a cable tray.

Accessories (optional)

Top and bottom side shelves (1)

- Measurements for 39,37" depth tables: 23,23x3,94x1,97", 23,23x3,94x3,94", 26,77x3,94x1,97", 26,77x3,94x3,94";
- Measurements for 55,12" depth tables: 33,46x3,94x1,97", 33,46x3,94"x3,94", 37,0x3,94x1,97", 37,0x3,94x3,94";
- Bent metal sheet with welded metal holders;
- Powder-coated metal;
- Different shelves are designed for two heights: 44,88" and 58,27" (measuring from the floor);
- Can be easily removed or placed on different legs without any tools;
- Maximum load capacity: 11,02 lbs per shelf.

Planter box (2)

- Measurements for 39,37" depth tables: 23,62x4,25x3,94";
- Measurements for 55,12" depth tables: 35,43x10,94x3,94";
- Bent metal sheet with welded metal holders;
- Powder-coated metal;
- Can be easily removed or placed without any tools;
- Meant to hang only on the top metal frames;
- Not suitable for direct planting;
- Maximum load capacity: 11,02 lbs per box.

Perforated top cover (3)

- Measurements for 39,37" depth tables: 62,99x6,46x0,91" (for L=66,14" tables), 70,87x6,46x0,91" (for L=74,02" tables);
- Measurements for 55,12" depth tables: 46,47x13,14x0,91" (2pcs., for L=97,64" tables), 54,33x13,14x0,91" (2pcs., for L=113,39" tables);
- 0,04" thickness metal sheet with perforated \varnothing 0,31" holes;
- Welded with metal profiles;
- Hang only on the top metal frames. Fixed with metal screws.

Set of hooks for perforated top cover (4)

- Made of bent wire, \varnothing 0,12";
- Powder-coated metal;
- Hang only on the perforated top cover;
- Maximum load capacity: 2,2 lbs per hook.

1




2



3



4



Monitor holder (5)

- Two heights available (monitor centre measured from the floor): 43,31" (only for tabletop H=29,13") or 56,69" (for tabletop H=29,13/35,43"/41,34");
- Hanging support is made from bent metal sheet. For 39,37" depth tables: 22,24x4,57x2,01" and 25,79"x4,57"x2,01". For 55,12" depth tables: 32,48x4,57x2,01" and 36,02x4,57x2,01";
- The plate for the monitor is made from a bent metal sheet (9,06x9,06x1,26");
- Powder-coated metal;
- VESA standard – 2,95x2,95", 3,94x3,94", 7,87x3,94", 7,87x7,87";
- Recommended screen up to 48"- 49" (maximum screen height 25,19/25.2"), weight up to 26,15 lbs;
- Screws for screen fixing to VESA plate are NOT INCLUDED.

Whiteboard with a holder (6)

- Two heights available (board centre measured from the floor): 43,31" (only for tabletop H=29,13") or 56,69" (for tabletop H=29,13/35,43"/41,34");
- Hanging support is made from bent metal sheet. For 39,37" depth tables: 22,24x4,57x2,01" and 25,79x4,57x2,01". For 55,12" depth tables: 32,48x4,57x2,01" and 36,03"x4,57x2,01";
- Plate for board fixing is made from a bent metal sheet (9,06x9,06x1,26");
- Board (26,98x22,83") from 0,55" MDF covered in HPL with sloping painted edges;
- Can be easily removed or placed on different sides of legs.

Hook (under tabletop) (7)

- Made from a bent metal sheet (3,15x3,07x1,18");
- Powder-coated metal;
- Fixing with screws (only under tabletop);
- Maximum load capacity: 11,02 lbs per hook.

5



6



7



Electrical accessories (optional)

Cable tray (for 39,37" depth tables)

- Dimensions: 18,9x14,45x2,68";
- Powder-coated metal.

Cable tray (for 55,12" depth tables)

- Dimensions: 19,69x3,94x4,43";
- Powder-coated metal.

Cable duct

- Plastic cable duct with metal base, L=29,53";
- Plastic cable duct with metal base, L=49,21".

Rounded metal desk grommet (for 55,12" depth tables)

- Metal sheet box dimensions – 12,68x5,04x1,03";
- Powder-coated metal.

Available power unit configurations (for 39,37" depth tables)

- Integrated AC power socket;
- Integrated AC power socket and USB fast charger type-A and type-C, with one cable guide for HDMI or LAN;
- Power unit (3 x AC power sockets 100 – 240 V).
Standards: EU, FR, UK, CH, US.

Available power unit configurations (for 55,12" depth tables)

- Power unit (3 x AC power sockets 100 – 240 V).
Standards: EU, FR, UK, CH, US.

Power supply cables

- AC plug – GST18i3 female connector;
- AC plug standards: EU, UK, FR, CH, US;
- Cable lengths: 39,37" and 118,11";
- Cable core: 0,0023 in² (EU, FR, UK, CH);
- Inline overcurrent protection (OCP 10A) (for the CH market);
- Cable core: 14AWG (for the US market);
- Inline overcurrent protection (OCP 15A) (for the US market);
- Inline overcurrent protection fulfils the statutory requirements: in the USA for more than 3 sockets, in Switzerland for more than 1 socket;
- Black colour.

Extension cables


- GST18i3 female connector – GST18i3 male connector;
- Cable lengths: 39,37", 78,74" and 118,11";
- Cable core: 0,0023 in² (EU, FR, UK, CH);
- Cable core: 14AWG (for the US market)
- Black colour.

Distributor block


- Distributor block GST18i3 (1 IN, 2 OUT);
- Distributor block GST18i3 (1 IN, 3 OUT).

Range


39,37" depth multipurpose tables

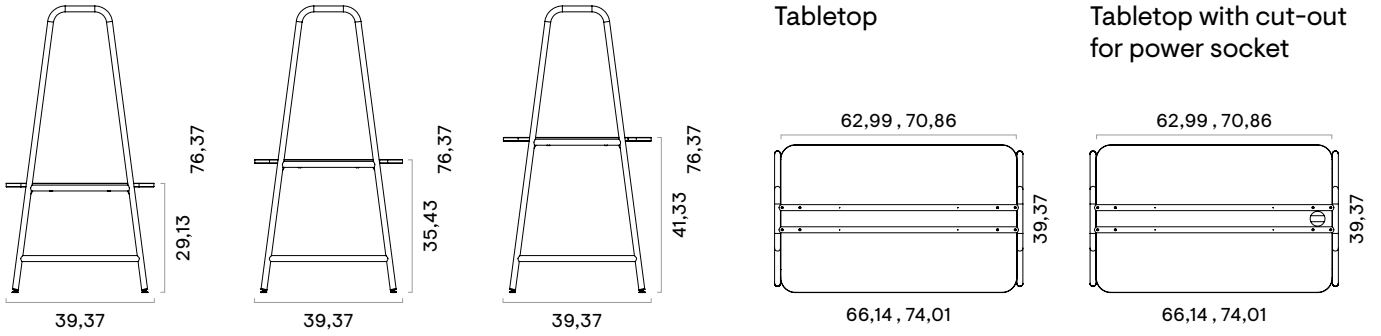


39,37" depth multipurpose tables with castors

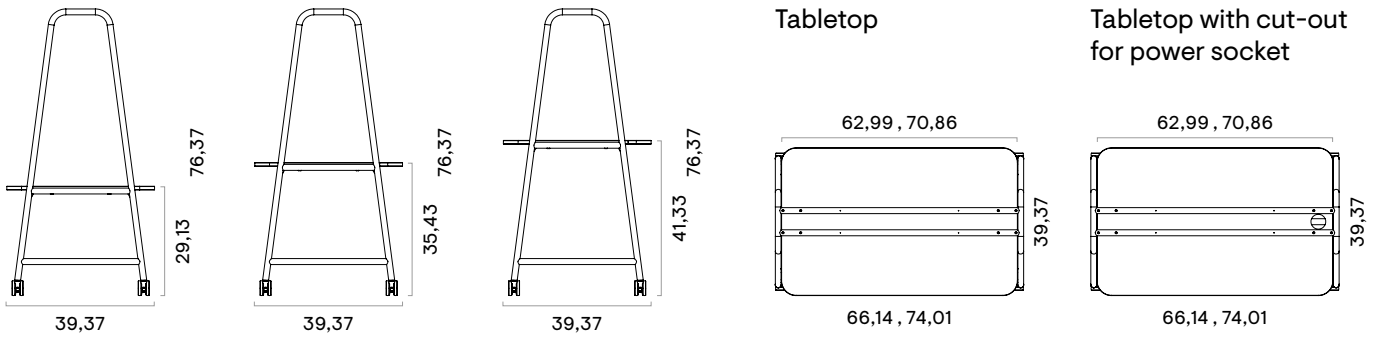


39,37" depth multipurpose table supplementary units (not possible with castors)

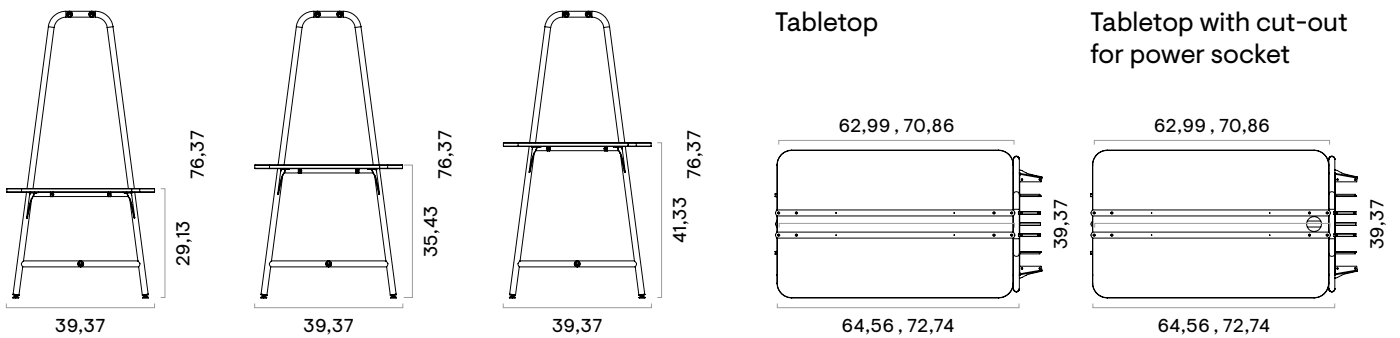


55,12” depth multipurpose tables

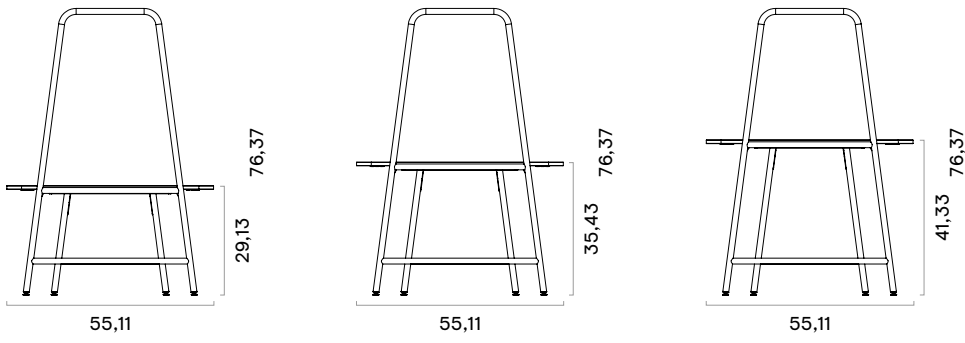

Tabletop

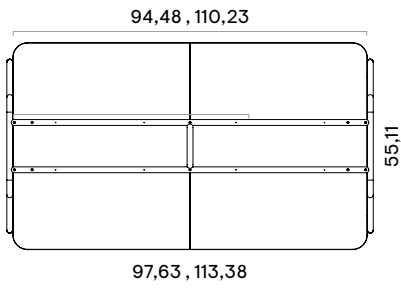


Tabletop with cut-out for power socket

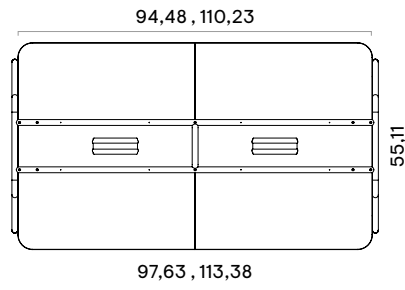


Additional information

- Two types of tabletops are available for the ROUND Multipurpose tables: HPL with sloping painted edges and Melamine with ABS 0,08" straight edges.

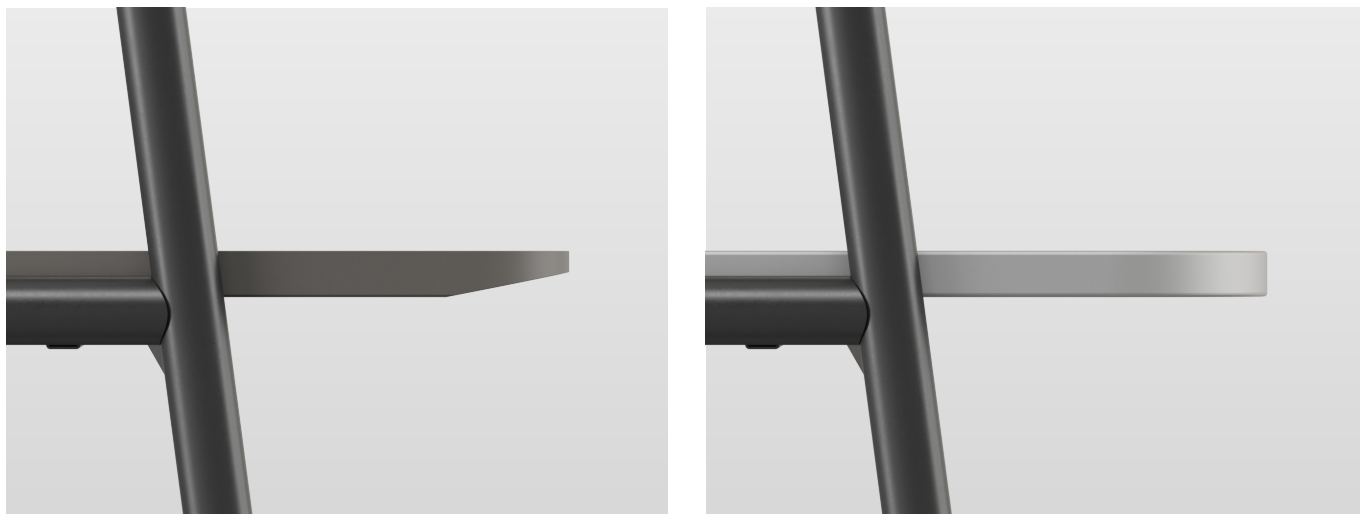

- There is no limitation to the number of supplementary units in one combination. Please note that with every additional supplementary unit, the general dimensions of the table increase by 0,04" (e.g. 3 additional supplementary units add 0,12" in width).

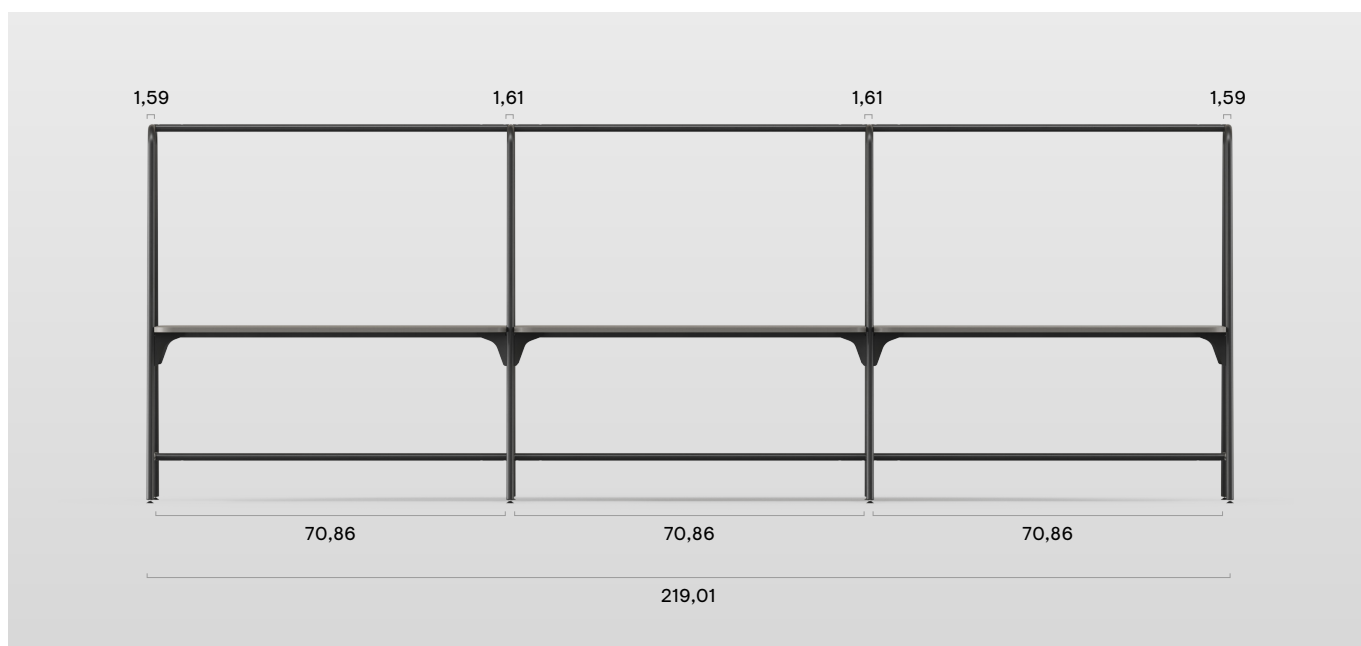

- Supplementary unit is possible only with tables of the same height.
- It is possible to hang two shelves and a monitor holder or a whiteboard on the same table leg and on different sides of the legs.
- Tool-free shelf, planter box, monitor holder and whiteboard assembly and removal.
- The perforated top cover is designed for decorative purposes only.
- A set of hooks should be placed on the perforated top cover. Hooks can be used to hang lights, plant garland or other lightweight decorations.

- Two different monitor holder and whiteboard holder heights available:



- Tables are made of bent metal tubes welded to other table parts. As a result, welding seam may be visible in some places.
- Due to the small size, the hooks for perforated top cover may be painted unevenly during the painting process. These minor paint irregularities will not be visible when placed on a perforated top cover.